

OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER

SECTION 11 TOWNSHIP 14 RANGE 2

DATE: -2-25-02 11-1-07

PARTY CHIEF: Kiste Greene

CREW: _____

TYPE OF MARKER: Harrison

METHOD OF ESTABLISHMENT: County 8-8-98


IN. S.P.C. E ZONE NAD '83

NAME: 14021102

N: 491805.6250(m)

E: 47481.4220(m)

Coord's Adjusted 3-30-04

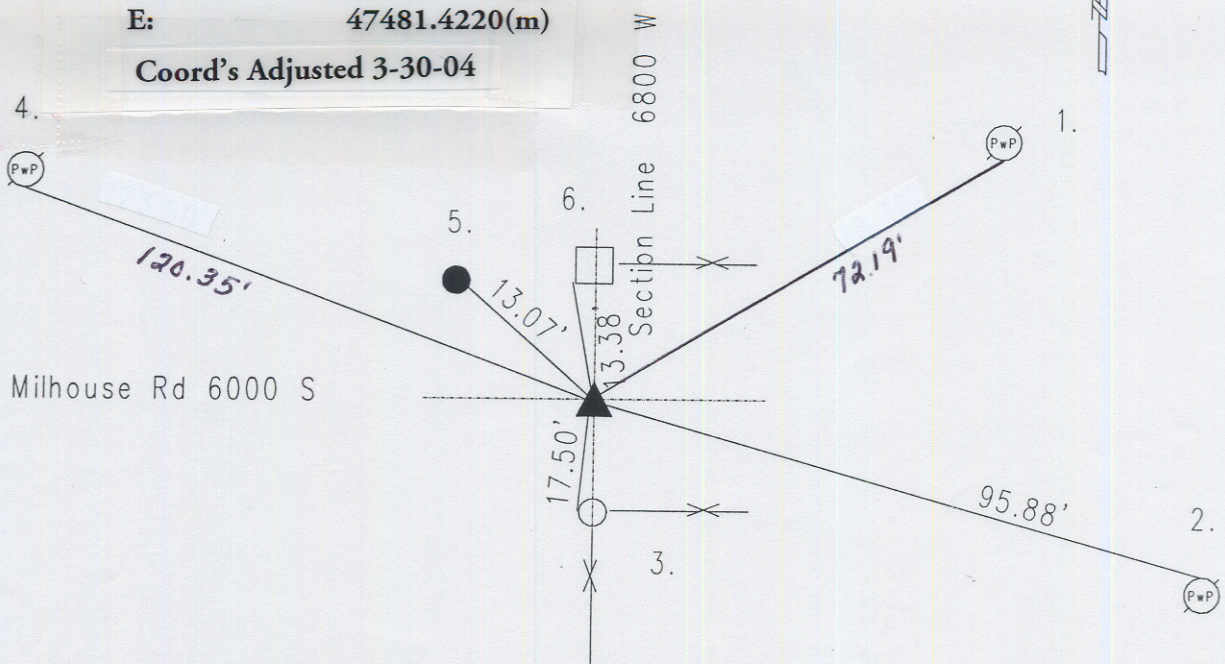

Original post set 1820 by Laughlin with witnesses: 14" beech N 68 E 5 links; 12' dogwood S 45 W 30 links per Marion County Atlas pg. 1. Decatur Township Legal Survey Book called no stone or witness. Reference (unknown date) called 3/4" rebar 5" down. Howe 10-30-74 called 1/2" pipe found at surface. Wilcoxen 7-8-85 called same. Kiste 5-25-90 called 1/2" pipe 3" down. Wilcoxen 3-11-96 called 1/2" pipe 3" down. Excavated 8-8-98 by Wilcoxen sothe found 14" down under rebar. Harrison set. Re-tied 2-25-02 by Kiste.

14021102

REF.	DISTANCE	DESCRIPTION
1.	72.19'	Mag nail w/washer S PwP#60-A 145 6"up
2.	95.88'	Mag nail w/MCSO washer N PwP no# 6"up
3.	17.50'	PK nail W corner fence post 12"up
4.	120.35'	PK nail S PwP#3-712 6"up (mag nail w/washer)
5.	13.07'	'center' 1 1/2" pipe in concrete
6.	13.38'	PK nail W corner fence post 15"up